

SURGiNG

紹 鑫 實 業



Fuses

保险丝



2D Series

2D $\Phi 3 \times 7$ RoHS Compliant




超小型保险丝(快断型)

Micro Fuse (Fast-Acting) 250V/125V

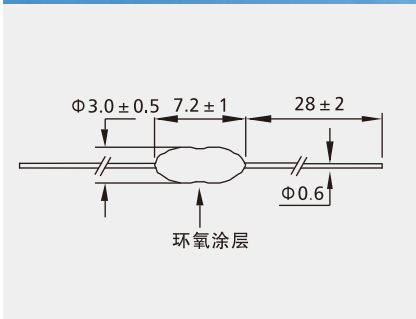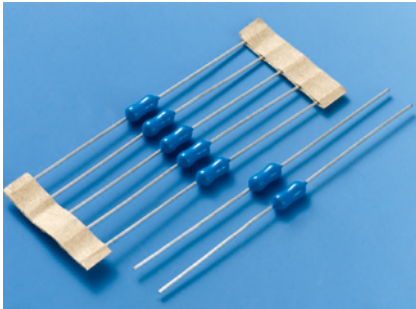

目录编号 Catalog No.	额定电流 Ampere Rating	额定电压 Voltage Rating	熔化热能 ² Melting Integral (A ² .S)
2D0100A/B	100mA	250V/125V	0.001
2D0125A/B	125mA	250V/125V	0.002
2D0160A/B	160mA	250V/125V	0.003
2D0200A/B	200mA	250V/125V	0.006
2D0250A/B	250mA	250V/125V	0.012
2D0300A/B	300mA	250V/125V	0.016
2D0315A/B	315mA	250V/125V	0.019
2D0350A/B	350mA	250V/125V	0.022
2D0400A/B	400mA	250V/125V	0.035
2D0500A/B	500mA	250V/125V	0.047
2D0630A/B	630mA	250V/125V	0.056
2D0750A/B	750mA	250V/125V	0.078
2D0800A/B	800mA	250V/125V	0.098
2D1100A/B	1A	250V/125V	0.3
2D1125A/B	1.25A	250V/125V	0.5
2D1150A/B	1.5A	250V/125V	0.6
2D1160A/B	1.6A	250V/125V	0.8
2D1200A/B	2A	250V/125V	1.2
2D1250A/B	2.5A	250V/125V	2
2D1300A/B	3A	250V/125V	2.5
2D1315A/B	3.15A	250V/125V	2.9
2D1350A/B	3.5A	250V/125V	3.1
2D1400A/B	4A	250V/125V	4.2
2D1500A/B	5A	250V/125V	7.2
2D1630A/B	6.3A	250V/125V	12

Time-Current Characteristics
电流-时间曲线图

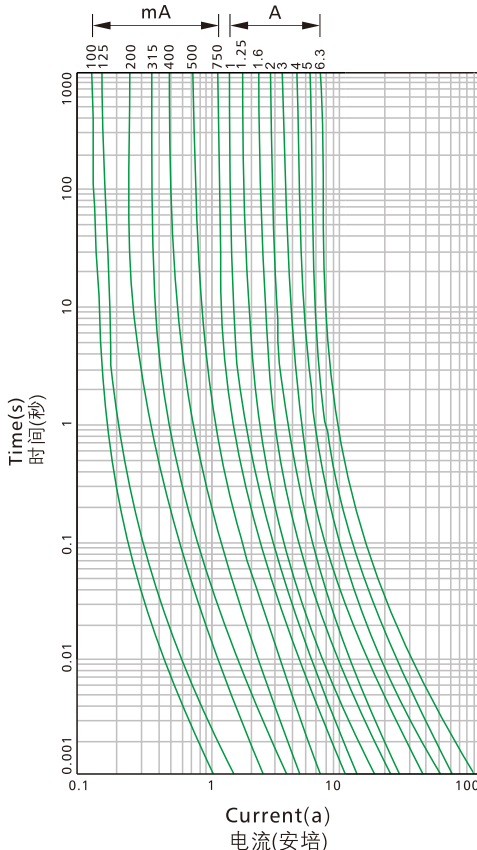

目录编号: Catalog No.A:250V B:125V

认证 Approvals	电流范围 Ampere Range	证书号 Certificate No.
	100mA~6.3A	E221465
	100mA~6.3A	E221465
	250mA~5A	2008010207263934

额定分断能力:

Interrupting Rating:
50 Amperes at 125V AC
50 Amperes at 250V AC

测试标准:

Testing Standard: UL248-14

电气特性 Electrical Characteristics:

额定电流的% % of Ampere Rating	熔断时间 Opening Time
100%	4 hours Min(大于4小时)
200%	60 s Max (小于60秒)