

SURGiNG

紹 鑫 實 業



Fuses

保险丝



SMT Series

SMT RoHS Compliant




微型保险丝(延时型)

Micro Fuse (Time-Lag) 250V

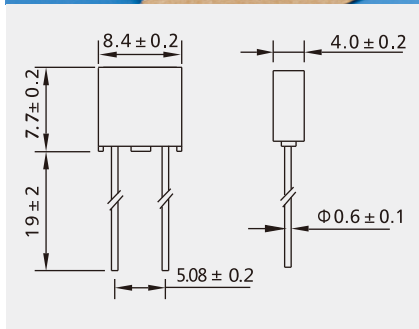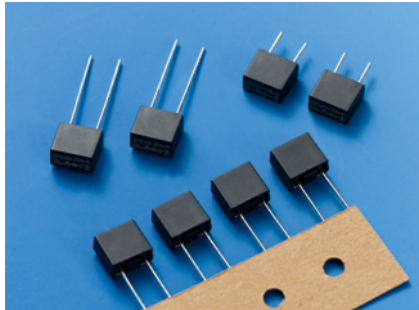

目录编号 Catalog No.	额定电流 Ampere Rating	额定电压 Voltage Rating	最大电压降(mv) Max Voltage Drop	熔化热能 ¹ Melting Integral (A ² .S)
SMT0500A	500mA	250V	190	0.9
SMT0630A	630mA	250V	180	1.2
SMT0800A	800mA	250V	160	3.2
SMT1100A	1A	250V	140	5.4
SMT1125A	1.25A	250V	130	7.9
SMT1160A	1.6A	250V	120	12.2
SMT1200A	2A	250V	100	20
SMT1250A	2.5A	250V	100	35
SMT1315A	3.15A	250V	100	55
SMT1400A	4A	250V	100	87
SMT1500A	5A	250V	100	130
SMT1630A	6.3A	250V	100	200

Time-Current Characteristics
电流-时间曲线图

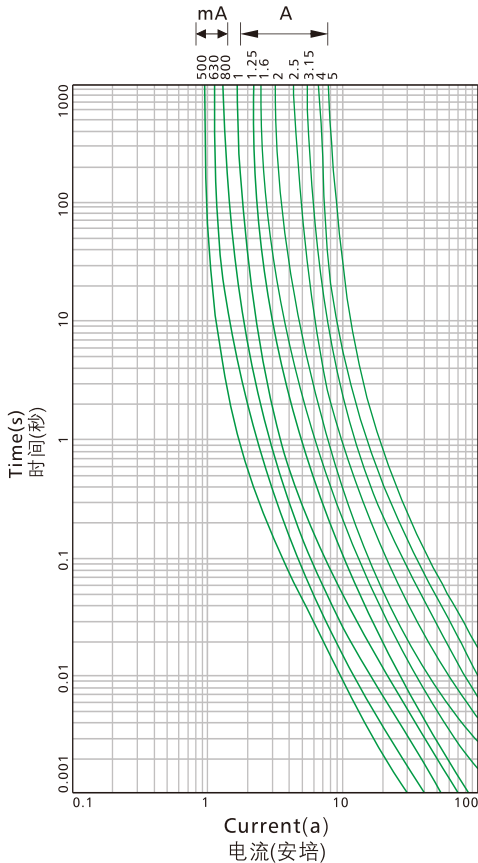

认证 Approvals	电流范围 Ampere Range	证书号 Certificate No.
cRU US	500mA~6.3A	E221465
DVE	500mA~4A	40012592
VDE	5A~6.3A	40013102
CQC	500mA~6.3A	CQC05012014400
S	500mA~5A	906062
PS E JET	1A~5A	JET5359-31007-2001
K	500mA~800mA	SU05026-7011A
K	1A~2.5A	SU05026-7012A
K	3.15A~4A	SU05026-7013A

额定分断能力:

Interrupting Rating:

35A or 10In Whichever is greater

测试标准:

Testing Standard: IEC60127-3 GB9364-3

电气特性 Electrical Characteristics:

额定电流的% % of Ampere Rating	熔断时间 Opening Time
210%	2 min Max(小于2分钟)
275%	400 ms~10 s
400%	150 ms~3 s
1000%	20 ms~150 ms