

**SURGiNG**  
紹 鑫 實 業





# Fuses

保险丝

SRT Series


**SRT RoHS Compliant**  **微型保险丝(延时型)**

**Micro Fuse (Time-Lag) 250V**

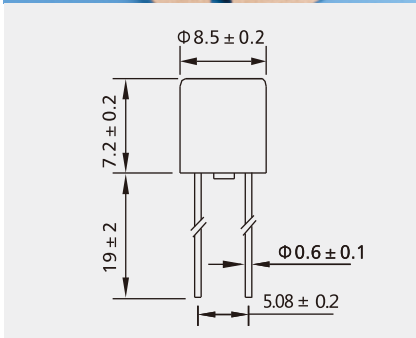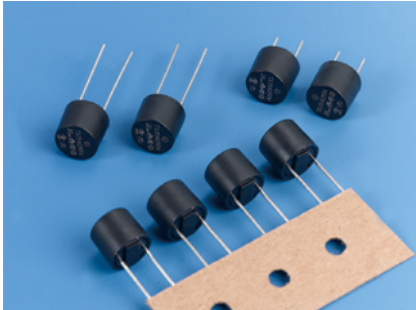

目录编号 Catalog No.	额定电流 Ampere Rating	额定电压 Voltage Rating	最大电压降(mv) Max Voltage Drop	熔化热能 <sup>2</sup> Melting Integral (A <sup>2</sup> .S)
SRT0250A	250mA	250V	240	0.2
SRT0315A	315mA	250V	220	0.3
SRT0400A	400mA	250V	200	0.5
SRT0500A	500mA	250V	190	0.7
SRT0630A	630mA	250V	180	1.2
SRT0800A	800mA	250V	160	1.8
SRT1100A	1A	250V	140	5.4
SRT1125A	1.25A	250V	130	7.9
SRT1160A	1.6A	250V	120	12
SRT1200A	2A	250V	100	20
SRT1250A	2.5A	250V	100	34
SRT1315A	3.15A	250V	100	54
SRT1400A	4A	250V	100	85
SRT1500A	5A	250V	100	130
SRT1630A	6.3A	250V	100	205

**Time-Current Characteristics**  
电流-时间曲线图

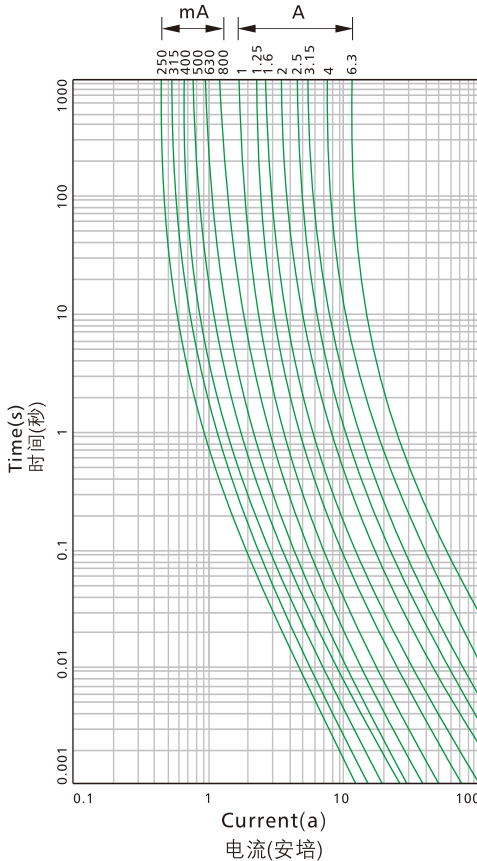

认证 Approvals	电流范围 Ampere Range	证书号 Certificate No.
	250mA~6.3A	E221465
	250mA~4A	40020193
	5A~6.3A	40037292
	250mA~4A	2006010207206689
	5A~6.3A	CQC12012068165
	250mA~4A	1124819
	1A~5A	JET5359-31007-2001
	250mA~800mA	SU05026-7008A
	1A~2.5A	SU05026-7009A
	3.15A~4A	SU05026-7010A

**额定分断能力:**

**Interrupting Rating:**

35A or 10In Whichever is greater

**测试标准:**

**Testing Standard: IEC60127-3 GB9364-3**

**电气特性 Electrical Characteristics:**

额定电流的% % of Ampere Rating	熔断时间 Opening Time
210%	2 min Max(小于2分钟)
275%	400 ms~10 s
400%	150 ms~3 s
1000%	20 ms~150 ms